

UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No.

P19365

Total Pages

 Inventor(s) or Application Identifier
Koichi SATO

Title: EXPOSURE CONTROLLER OF A DIGITAL CAMERA

(Only for new nonprovisional applications under 37 CFR 1.53(b))

ADDRESS TO:

 Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

APPLICATION ELEMENTS

ACCOMPANYING APPLICATION PARTS

1. ☒ Fee Transmittal Form2. ☒ Specification [Total Pages 24]

- (preferred arrangement set forth below)
- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

☒ Drawing(s) (35 USC 113) [Total Sheets 3]☒ Oath or Declaration [Total Pages 3]a. ☒ Newly executed (original or copy) ☐ Unexecuted
 b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 18 completed)
[Note Box 5 below]
i. ☐ DELETION OF INVENTOR(S)
 Signed statement attached deleting inventor(s)
named in the prior application, see 37 CFR 1.63(d)(2)
and 1.33(b).
☐ Incorporation By Reference (useable if Box 4b is checked)
 The entire disclosure of the prior application, from which a copy
of the oath or declaration is supplied under Box 4b, is considered
as being part of the disclosure of the accompanying application
and is hereby incorporated by reference therein.
☐ Microfiche Computer Program (Appendix)

7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)

- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

8. ☒ Assignment Papers (cover sheet & document(s))9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney10. ☐ English Translation Document (if applicable)11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations12. ☐ Preliminary Amendment13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application, Status still proper and desired15. ☐ The prior application is assigned of record to _____16. ☒ Foreign priority claimed

- a. ☒ Claim of Priority
- b. ☒ Certified Copy of Priority Document(s)

17. ☐ Other: _____

18. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior Application No. _____/_____, filed _____.
19. ☐ Amend the specification by inserting before the first line the sentence:

This application is a _____ continuation-in-part, _____ continuation, _____ division, of Application No. _____/_____, filed _____.

Address all future correspondence to Customer No. 7055 at the present address of:

GREENBLUM & BERNSTEIN, P.L.C.

 1941 Roland Clarke Place
Reston, VA 20191
(703) 716-1191

Date

Signature

Bruce H. Bernstein, Reg No. 29,027

Typed or Printed Name

EXPOSURE CONTROLLER OF A DIGITAL CAMERA

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 The present invention relates to an exposure controller of a digital camera, more specifically, to improving the pre-exposure operation in a digital camera which is performed to calculate an optimum exposure time (shutter speed) at which the main exposure is performed.

2. Description of the Related Art

10 Conventional digital cameras are provided with a CCD image sensor (image pick-up device) on which the image is captured. Since the dynamic range of the CCD image sensor is generally narrow, the shutter speed (charge accumulating time/exposure time) has to be precisely determined to capture a clear image. In order to determine the shutter speed precisely, a method of performing a pre-exposure before the main exposure is known in the art. Namely, an exposure calculation is performed to determine an optimum shutter speed in accordance with a picture signal obtained from the CCD image sensor by the pre-exposure. Note that in the main exposure, the image captured on the CCD image sensor is stored in a recording medium such as a memory.

25 In the case where the shutter speed for the pre-exposure is relatively slow due to lack of quantity of light

from an object to be photographed, the time lag between the pre-exposure and the main exposure becomes large. As a result, electric power consumption necessary to keep holding each of the quick-return mirror, the shutter, and the diaphragm of the camera at a predetermined position increases, especially in a single-lens reflex electronic camera, which is not preferable.

SUMMARY OF THE INVENTION

The primary object of the present invention is to provide an exposure controller which makes it possible to reduce the time necessary for performing the pre-exposure before the main exposure to thereby reduce the time lag between the pre-exposure and the main exposure.

To achieve the object mentioned above, according to an aspect of the present invention, an exposure controller of a digital camera is provided, using an image pick-up device on which an image of an object to be photographed is captured, the exposure controller including a photometering sensor; and a control device. The control device calculates a first exposure time in accordance with a photometering value obtained via the photometering sensor, and performs a pre-exposure in which a sensitive surface of the image pick-up device is exposed at a second exposure time shorter than the first exposure time. Thereafter, the

09547098 071400

control device performs a main exposure in which the sensitive surface of the image pick-up device is exposed at a third exposure time obtained by changing the value of one of the first exposure time and the second exposure time in accordance with a picture signal output from the image pick-up device, the picture signal being output when the image pick-up device is exposed at the second exposure time by the pre-exposure.

Preferably, the digital camera is an SLR digital camera.

According to another aspect of the present invention, an exposure controller of a digital camera is provided, including a photometering sensor, and a control device. The control device performs an exposure operation to calculate a first exposure time in accordance with a photometering value obtained via the photometering sensor. The control device calculates a second exposure time shorter than the first exposure time in the case where the first exposure time is longer than a reference time duration.

The control device performs a pre-exposure in which a sensitive surface of an image pick-up device of the digital camera is exposed at the second exposure time to calculate a brightness value in accordance with a picture signal which is output from the image pick-up device at the pre-exposure.

The control device calculates a third exposure time which

is to be used at a main exposure, in which the sensitive surface of the image pick-up device is exposed to obtain a picture signal which is to be stored in a memory, by changing the value of one of the first exposure time and
5 the second exposure time in accordance with the calculated brightness value.

The reference time duration can be a predetermined flash synchronization speed (exposure time).

In an embodiment, the second exposure time is equal
10 to the first exposure time divided by the Nth power of two (2^N).

In an embodiment, the control device calculates the third exposure time in accordance with an average of brightness values of all pixels of the image pick-up device
15 which are obtained by the pre-exposure.

In an embodiment, the third exposure time is calculated by multiplying the second exposure time by an exposure compensation factor, wherein the exposure compensation factor is calculated by dividing a
20 predetermined value by the average brightness value, and multiplying the result thereof by the Nth power of two (2^N).

In an embodiment, the reference time duration is a slowest exposure time which can just prevent an image formed on the sensitive surface of the image pick-up device from
25 becoming blurry, caused by hand movement.

Preferably, the digital camera is an SLR digital camera.

According to another aspect of the present invention, an SLR digital camera includes a photometering sensor for measuring a object brightness, a CCD image sensor, a focal plane shutter positioned in front of the CCD image sensor, and a control device. The control device calculates a first exposure time in accordance with a photometering value obtained by the photometering sensor, and drives the focal plane shutter at a second exposure time shorter than the first exposure time. Furthermore, the control device subsequently drives the focal plane shutter at a third exposure time obtained by changing the value of one of the first exposure time and the second exposure time in accordance with a picture signal output from the CCD image sensor, the picture signal being output when the CCD image sensor is exposed at the second exposure time via the control device.

The present disclosure relates to subject matter contained in Japanese Patent Application No.11-203249 (filed on July 16, 1999) which is expressly incorporated herein by reference in its entirety.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be described below in

detail with reference to the accompanying drawings in which:

Figure 1 is a block diagram of an embodiment of a digital camera having an exposure controller according to
5 the present invention;

Figure 2 is a flow chart showing the first half of a photographic operation control routine performed in the digital camera shown in Figure 1; and

Figure 3 is a flow chart showing the latter half of
10 the photographic operation control routine.

DESCRIPTION OF THE PREFERRED EMBODIMENT

A digital camera whose essential elements are shown in the form of blocks in Fig. 1 is an embodiment of an SLR
15 (Single-Lens Reflex) digital camera having an interchangeable lens 11 and a camera body (not shown) to which the interchangeable lens 11 is attached.

The interchangeable lens 11, attached to the camera body, is electrically connected to electrical circuits
20 provided within the camera body via a set of electrical contacts 12 and a corresponding set of electrical contacts 13, which are formed on, e.g., each of a lens mount (lens mount ring) and a body mount (body mount ring) provided on the rear end of the interchangeable lens 11 and the front
25 of the camera body, respectively.

5 The interchangeable lens 11 is provided therein with
a front lens group 14 and a rear lens group 15. The
interchangeable lens 11 is provided between the front lens
group 14 and the rear lens group 15 with a diaphragm (iris
10 diaphragm) 16. A lens control circuit 17 provided in the
interchangeable lens 11 controls each of the front and rear
lens groups 14 and 15 to move along an optical axis of the
interchangeable lens 11 to adjust the focal point so as to
bring a object into focus. The lens control circuit 17
15 operates in accordance with a control signal transmitted
from a system controller (control device) 31 provided in
the camera body via the electrical contacts 12. The
diaphragm 16 operates to adjust the aperture size thereof
in accordance with a control signal transmitted from a
20 diaphragm control circuit 32 provided in the camera body
via the electrical contacts 13. The diaphragm control
circuit 32 is connected to the system controller 31 to be
controlled thereby.

25 The camera body (a mirror box 30) is provided therein
behind the front and rear lens groups 14 and 15 on the optical
axis thereof with a quick-return mirror 21. The quick-
return mirror 21 is rotatable between an inclined initial
position (shown in Fig. 1) and a raised or retracted
position (horizontal position). The camera body is
provided above the quick-return mirror 21 with a focusing

screen 22. The camera body is provided above the focusing screen 22 with a pentagonal prism (erecting prism) 23. The camera body is provided behind the pentagonal prism 23 with an eyepiece 24.

The camera body is provided behind the quick-return mirror 21 with a focal plane shutter 25. The camera body is provided behind the focal plane shutter 25 with a filter 26 for filtering infrared rays and an optical low-pass filter 27, in this order from the focal plane shutter 25.

The camera body is provided behind the optical low-pass filter 27 with a CCD image sensor (image pick-up device) 33. Accordingly, the quick-return mirror 21, the focal plane shutter 25, the filter 26, the optical low-pass filter 27 and the CCD image sensor 33 are arranged in this order from the object side (i.e., from left to right as viewed in Fig. 1) on the optical axis O of the interchangeable lens 11.

The quick-return mirror 21 is driven to rotate by a mirror drive circuit 34 connected to the system controller 31, while the focal plane shutter 25 is driven to open and shut by a shutter control circuit 35 connected to the system controller 31. The mirror drive circuit 34 and the shutter control circuit 35 are each controlled by the system controller 31.

The quick-return mirror 21 is normally positioned in

an inclined initial position shown in Fig. 1. The quick-return mirror 21 in the initial position reflects the incident light, which emerges from the rear end of the rear lens group 15 to enter the quick-return mirror 21, upwardly
5 towards the pentagonal prism 23. At this time the focal plane shutter 25 is closed to close a light path which leads light to the sensitive surface of the CCD image sensor 27. On the other hand, when a picture is taken (when a photographic operation is undertaken), the quick-return
10 mirror 21 is driven to swing up to the raised position thereof by the mirror drive circuit 34 to retreat from an optical path between the rear lens group 15 and the focal plane shutter 25. Immediately after the quick-return mirror 21 is completely raised, the focal plane shutter 25
15 is driven to open by the shutter drive circuit 35, so that the light which enters into the camera body via the interchangeable lens 11 is incident on the sensitive surface of the CCD image sensor 27 via the filter 26 and the optical low-pass filter 27. Therefore, an image is
20 formed on the sensitive surface of the CCD image sensor 27 via the front and rear lens groups 14 and 15, so that the CCD image sensor 33 converts light incident on the sensitive surface thereof into an electrical signal which corresponds to the image formed on the sensitive surface of the CCD image
25 sensor 33.

A pulse-signal pattern generator (PPG) 36 is connected to the system controller 31. The system controller 31 controls the pulse-signal pattern generator 36 to generate various types of pulse signals. In accordance with these pulse signals, a CCD drive circuit 37, an A/D converter 38 and a picture signal processing circuit 39 are controlled. The operation of the CCD image sensor 33 is controlled by the CCD drive circuit 37. A picture signal read out of the CCD image sensor 33 is converted into a corresponding digital signal by the A/D converter 38. The picture signal processing circuit 39 receives the digital signal from the A/D converter 38 to give a predetermined image processing to the digital signal. A memory 40 (e.g., a flash memory), having a storing capacity that is a plurality of times the capacity necessary for storing a picture signal of a single picture frame (a single image), is connected to the picture signal processing circuit 39.

A monitor interface 41, a card interface 42 and a PC interface 43 are connected to the picture signal processing circuit 39. The interfaces 41, 42 and 43 are controlled by the system controller 31. An LCD backlight 45 and an LCD panel 46 are connected to the monitor interface 41 via an LCD drive circuit 44. The LCD drive circuit 44 is controlled in accordance with the picture signal read out

the focal plane shutter 25 operates (opens and shuts) at the set exposure time therefor, and thereafter the quick-return mirror 21 is moved down again. Consequently the sensitive surface of the CCD image sensor 33 is exposed, so that it outputs a picture signal corresponding to the image formed on the sensitive surface of the CCD image sensor 33. The state indicating device 55 is provided with an LCD panel (not shown) which indicates various photographic information on the digital camera. The camera body of the digital camera is provided thereon with a hot shoe 56 to which an external flash can be attached. The camera body of the digital camera is provided therein with a flash control circuit 57 which controls the flash attached to the hot shoe 56. The flash control circuit 57 is controlled by the system controller 31.

Figs. 2 and 3 show a flow chart showing a photographic operation control routine performed in the present embodiment of the SLR digital camera. In the following descriptions of the flow chart shown in Figs. 2 and 3, in the pre-exposure operation and the main exposure operation, the quick-return mirror 21 is moved up, and the focal plane shutter 25 opens and closes at the set exposure time thereof. Accordingly, the sensitive surface of the CCD image sensor 33 is exposed, and thereafter, the quick-return mirror 21 is moved down.

Firstly it is determined at step S101 whether the photometering switch is ON. The operation at step S101 is repeatedly performed as long as the photometering switch is OFF. If the photometering switch is turned ON, an exposure calculation is performed at step S102. In the exposure calculation, the aperture size of the iris diaphragm 16 and a first exposure time are calculated in accordance with the photometering value obtained via the photometering sensor 52.

Subsequently, at step S103 it is determined whether the first exposure time calculated at step S102 is longer than a predetermined flash synchronization speed (e.g., 1/100 second). If it is determined that the first exposure time is longer than the flash synchronization speed, control proceeds to step S104 at which a parameter N is set at 3. If it is determined that the first exposure time is equal to or shorter than the flash synchronization speed, control proceeds to step S105 at which the parameter N is set at 0 (zero).

After the operation at step S104 or S105, control proceeds to step S106. At step S106 a second exposure time (a pre-exposure time) which is equal to the first exposure time divided by the Nth power of two (2^N) is calculated (wherein "N" represents the aforementioned parameter set at step S104 or step S105). Therefore, if the first

exposure time is 1 second on condition that the flash synchronization speed is 1/100 second, the operation at step S104 is performed, so that the second exposure time is determined to be 1/8 second. If the first exposure time is 1/125 second on condition that the flash synchronization speed (exposure time) is 1/100 second, the operation at step S105 is performed, so that the second exposure time is determined to be 1/125 second (i.e. the first exposure time is same as the second exposure time).

Thereafter, it is determined at step S107 whether the release switch is ON. If it is determined that the release switch is not ON, control returns to step S101. If it is determined ON, control proceeds to step S108. At step S108 the pre-exposure is performed at the second exposure time to make the sensitive surface of the CCD image sensor 33 exposed. Subsequently, at step S109, the picture signal obtained by the pre-exposure is read out of the CCD image sensor 33. The CCD image sensor 33 is made up of thousands of individual photodiodes (also known as picture elements or pixels) arranged in a two-dimensional matrix (e.g., 600 x 400 matrix). A picture signal output from the CCD image sensor 33 is made up of pixel data obtained by each pixel of the CCD image sensor 33.

After the operation at step S109, control proceeds to step S110. At step S110, in the picture signal

processing circuit 39, firstly the brightness value of each pixel of the CCD image sensor 33 is calculated in accordance with the pixel data obtained by the pixel of the CCD image sensor 33 and subsequently the average of all the calculated brightness values is multiplied by 2^n after the average is calculated. For instance, in the case where the first exposure time and the second exposure time are 1 second and 1/8 second, respectively, the pre-exposure is performed at an exposure time which is an eighth of the main exposure, i.e., is divided by the third power of two (2^3). Accordingly, at step S110 the average of all the brightness values is multiplied by the third power of two (2^3) to calculate the average of all the brightness values when the pre-exposure is performed at the first exposure time (1 second).

At step S111 an exposure compensation factor K is calculated by dividing the average of all the brightness values obtained at step S110 by a predetermined appropriate value (predetermined value). In the case where each data such as pixel data is processed to be expressed by an eight binary digit, since the maximum luminance is 255, the predetermined appropriate value is, e.g., 120, which is roughly half of the maximum luminance. Accordingly, if the average of all the brightness values is 100, the exposure compensation factor K is equal to 120 divided by 100, namely, 1.2 ($K=120/100=1.2$). At step S112 a third exposure time

is calculated by multiplying the first exposure time by the exposure compensation factor K. For instance, if the first exposure time and the exposure compensation factor K are 1 second and 1.2, respectively, the third exposure time is 1.2 seconds.

At step S113, the main exposure is performed at the third exposure time to make the sensitive surface of the CCD image sensor 33 exposed. At step S114, the picture signal obtained at the main exposure is read out of the CCD image sensor 33. At step S115, image processing operations such as an interpolation operation, a color adjusting operation and a gamma control operation are performed in accordance with all the pixel data of the picture signal read out of the CCD image sensor 33 at step S114. These image processing operations are conventional ones known by those skilled in the art, so that the details are not herein discussed. At step S116 image data obtained through the image processing operations performed at step S115 are stored in the memory 40. This completes the photographic operation control routine shown in Figs. 2 and 3.

As can be understood from the foregoing, in the present embodiment of the digital camera, if the first exposure time, which is calculated in accordance with the photometering value, is longer than a reference time duration (the flash synchronization speed in this

dividing the predetermined appropriate value by the average of the brightness values for an entire image except for peripheral edge thereof.

In the illustrated embodiment, although the third exposure time is calculated by changing the value of the first exposure time using the exposure compensation factor K (specifically, by multiplying the first exposure time by the exposure compensation factor K), the third exposure time can be calculated by changing the value of the second exposure time. In this case, the exposure compensation factor K is replaced by another exposure compensation factor which is equal to the exposure compensation factor K multiplied by the Nth power of two ($K2^N$).

As can be understood from the foregoing, according to an exposure controller of a digital camera to which the present invention is applied, the time necessary for performing the pre-exposure can be shortened, which makes it possible to reduce the time lag between the pre-exposure and the main exposure.

Furthermore, in the drawings, the quick-return mirror 21 in the pre-exposure and main exposure is shown in the up and down positions, respectively; however, when the quick-return mirror 21 is moved to the up position during the pre-exposure, the quick-return mirror 21 can be maintained in the up position until the main exposure

has completed.

In the drawings, the first, second, and third exposure times are the opening and shutting drive speeds of the focal plane shutter; however, the first, second and third
5 exposure times can be set as electronic shutters speeds for the CCD 33, wherein the time for accumulating electric charge is electronically controlled.

Obvious changes may be made in the specific embodiment of the present invention described herein, such
10 modifications being within the spirit and scope of the invention claimed. It is indicated that all matter contained herein is illustrative and does not limit the scope of the present invention.

What is claimed is:

1. An exposure controller of a digital camera using an image pick-up device on which an image of an object to be photographed is captured, said exposure controller

5 comprising:

a photometering sensor; and

a control device; wherein

said control device calculates a first exposure time in accordance with a photometering value obtained via said

10 photometering sensor;

said control device performs a pre-exposure in which a sensitive surface of said image pick-up device is exposed at a second exposure time shorter than said first exposure time; and

15 said control device performs a main exposure in which said sensitive surface of said image pick-up device is exposed at a third exposure time obtained by changing the value of one of said first exposure time and said second exposure time in accordance with a picture signal output
20 from said image pick-up device, said picture signal being output when said image pick-up device is exposed at said second exposure time by said pre-exposure.

2. The exposure controller of a digital camera according to claim 1, wherein said digital camera is an SLR
25 digital camera.

3. An exposure controller of a digital camera,
comprising:

a photometering sensor; and

a control device; wherein

5 said control device performs an exposure operation
to calculate a first exposure time in accordance with a
photometering value obtained via said photometering
sensor;

10 said control device calculates a second exposure time
 shorter than said first exposure time in the case where said
 first exposure time is longer than a reference time
 duration;

said control device performs a pre-exposure in which
a sensitive surface of an image pick-up device of said
15 digital camera is exposed at said second exposure time to
calculate a brightness value in accordance with a picture
signal which is output from said image pick-up device at
said pre-exposure; and

said control device calculates a third exposure time
20 which is to be used at a main exposure, in which said
sensitive surface of said image pick-up device is exposed
to obtain a picture signal which is to be stored in a memory,
by changing the value of one of said first exposure time
and said second exposure time in accordance with said
25 calculated brightness value.

4. The exposure controller of a digital camera according to claim 3, wherein said reference time duration is a predetermined flash synchronization speed.

5 5. The exposure controller of a digital camera according to claim 3, wherein said second exposure time is equal to said first exposure time divided by the Nth power of two (2^N).

6. The exposure controller of a digital camera according to claim 4, wherein said control device
10 calculates said third exposure time in accordance with an average brightness value of all the pixels of said image pick-up device which are obtained by said pre-exposure.

7. The exposure controller of a digital camera according to claim 6, wherein said third exposure time is
15 calculated by multiplying said second exposure time by an exposure compensation factor;

wherein said exposure compensation factor is calculated by dividing a predetermined value by said average brightness value, and multiplying the result
20 thereof by the Nth power of two (2^N).

8. The exposure controller of a digital camera according to claim 3, wherein said reference time duration is a longest exposure time which can just prevent an image formed on said sensitive surface of said image pick-up
25 device from becoming blurry, caused by hand movement.

9. The exposure controller of a digital camera according to claim 3, wherein said digital camera is an SLR digital camera.

10. An SLR digital camera comprising:

5 a photometering sensor for measuring a object brightness;

a CCD image sensor;

a focal plane shutter positioned in front of said CCD image sensor;

10 a control device; wherein

said control device calculates a first exposure time in accordance with a photometering value obtained by said photometering sensor;

15 said control device drives said focal plane shutter at a second exposure time shorter than said first exposure time; and

said control device subsequently drives said focal plane shutter at a third exposure time obtained by changing the value of one of said first exposure time and said second exposure time in accordance with a picture signal output from said CCD image sensor, said picture signal being output when said CCD image sensor is exposed at said second exposure time via said control device.

20

EXPOSURE CONTROLLER OF A DIGITAL CAMERA

ABSTRACT OF THE DISCLOSURE

An exposure controller of a digital camera, using an
5 image pick-up device, includes a photometering sensor, and
a control device. The control device calculates a first
exposure time in accordance with a photometering value
obtained via the photometering sensor, and performs a
pre-exposure in which a sensitive surface of the image
10 pick-up device is exposed at a second exposure time shorter
than the first exposure time. Thereafter, the control
device performs a main exposure in which the sensitive
surface of the image pick-up device is exposed at a third
exposure time obtained by changing the value of one of the
15 first exposure time and the second exposure time in
accordance with a picture signal output from the image
pick-up device, the picture signal being output when the
image pick-up device is exposed at the second exposure time
by the pre-exposure.

Fig.1

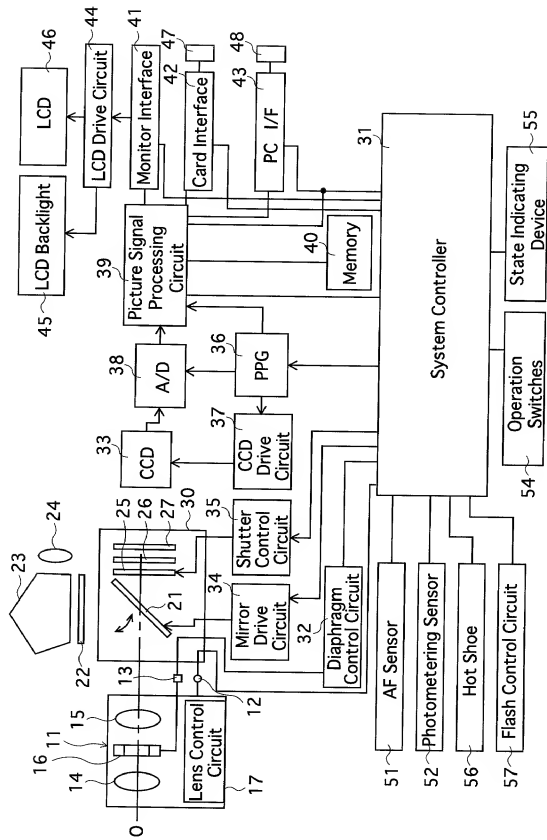


Fig. 2


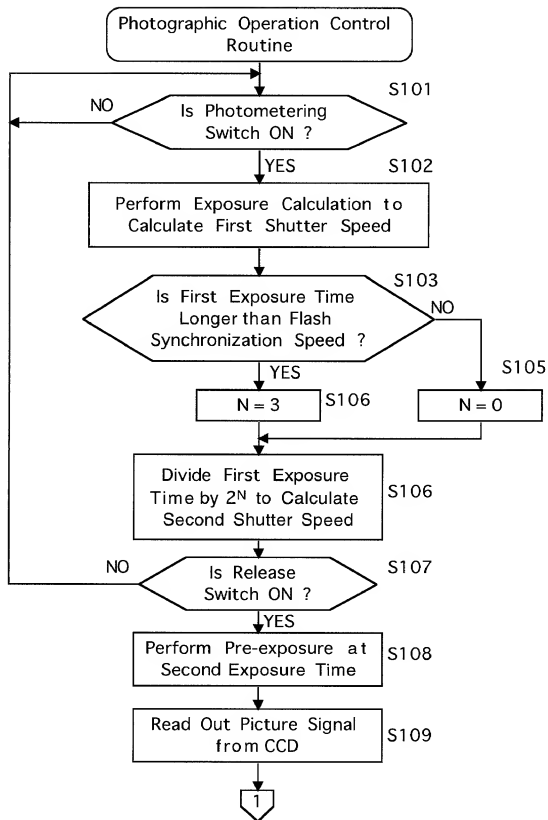


Fig. 3

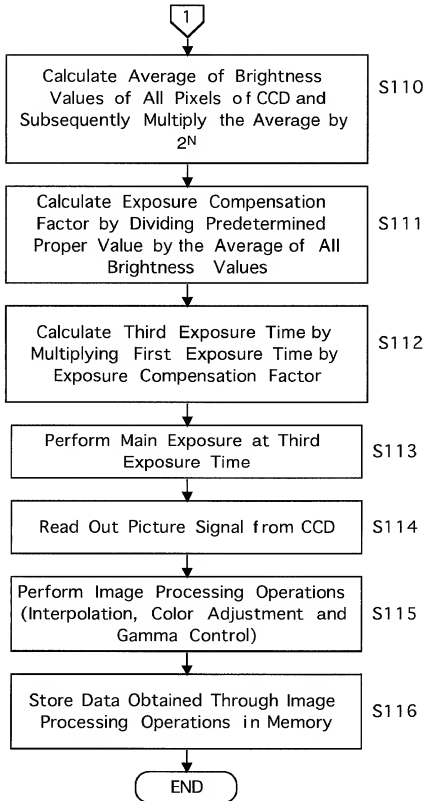

Declaration and Power of Attorney For Utility or Design Patent Application 特許出願宣言書

Japanese Language Declaration

私は、下欄に氏名を記載した発明者として、以下のとおり宣言する：

私の住所、郵便の宛先および国籍は、下欄に氏名に続いて記載したとおりあり。

私の名前の発明に関し、請求の範囲に記載した特許を求める主題の本来の、最初にして唯一の発明者である(一人の氏名のみが下欄に記載されている場合)か、もしくは本来の、最初にして共同の発明者である(複数の氏名が下欄に記載されている場合)と信じ、

私の明細書を

☐ (該当する)に印を付す

☐ ここに添付する。

☐ _____ 日に出席番号

第 _____ 号として提出し、

_____ 日に補正した。

(該当する場合)

私は、前記のとおり補正した請求の範囲を含む前記明細書の内容を検討し、理解したことを陳述する。

私は、連邦規則法典第37部第1章第56条に従い、本題の審査に所要の情報を開示すべき義務を有することを認める。

私は合衆国法典第35部第119条(a)-(d)項又は第365条(b)項に基づき、下記の外国特許出願又は発明者延出願、或いは第365条(a)項に基づき、少なくとも米国以外の1ヶ国を指名したPCT国際出願の外国優先権利益を主張し、更に優先権の主張に係る基礎出願の出願日前の出発日を有する外国特許出願、又は発明者延出願或るいはPCT国際出願を以下に明記する：

Prior foreign applications
先の外国出願

11-203249 (P)	Japan	16/07/1999
(Number)	(Country)	(Day/Month/Year Filed)
(番号)	(国名)	(出願の年月日)
_____	_____	_____
(Number)	(Country)	(Day/Month/Year Filed)
(番号)	(国名)	(出願の年月日)
_____	_____	_____
(Number)	(Country)	(Day/Month/Year Filed)
(番号)	(国名)	(出願の年月日)
_____	_____	_____

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

EXPOSURE CONTROLLER OF A DIGITAL

CAMERA

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as

Application No. _____

and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the "No" box, any foreign application for patent or inventor's certificate, or of any PCT International application having a filing date before that of the application on which priority is claimed:

Priority claimed
優先権の主張

<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
<input type="checkbox"/> Yes	<input type="checkbox"/> No
<input type="checkbox"/> Yes	<input type="checkbox"/> No
<input type="checkbox"/> Yes	<input type="checkbox"/> No
<input type="checkbox"/> Yes	<input type="checkbox"/> No
<input type="checkbox"/> Yes	<input type="checkbox"/> No
<input type="checkbox"/> Yes	<input type="checkbox"/> No
<input type="checkbox"/> Yes	<input type="checkbox"/> No

Japanese Language Utility or Design Patent Application Declaration

☐ その他の外国特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional foreign application numbers are listed on a supplemental priority sheet attached hereto.

私は、合衆国法典第35条第119条(e)項に基づく、下記の合衆国仮特許出願の利益を主張する。

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

(Number) (番号)	(Day/Month/Year Filed) 出願の年月日
(Number) (番号)	(Day/Month/Year Filed) 出願の年月日
(Number) (番号)	(Day/Month/Year Filed) 出願の年月日

☐ その他の合衆国仮特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional provisional application numbers are listed on a supplemental priority sheet attached hereto.

私は、合衆国法典第35条第120条に基づく下記の合衆国特許出願、又は §365(c) 項に基づく合衆国を指名したPCT国際出願の利益を主張し、本願の請求の範囲各項に記載の主題が合衆国法典第35条第112条第1項規定の態様で、先の合衆国特許出願又はPCT国際出願に開示されていない程度に認めて、先の出願の出願日と本願の国内出願日又はPCT国際出願日の間に有効となった連邦規則法典第37部第1章第56条に記載の特許要件に必要の情報を開示すべき義務を有することを認める。

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s), or §365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application No.) (出願番号)	(Day/Month/Year Filed) (出願の年月日)	(状況) (特許済み、係属中 放棄済み)	(Status) (patented, pending, abandoned)
(Application No.) (出願番号)	(Day/Month/Year Filed) (出願の年月日)	(状況) (特許済み、係属中 放棄済み)	(Status) (patented, pending, abandoned)

☐ その他の合衆国又は国際特許出願番号は別紙の追補優先権欄にて記載する。

☐ Additional U.S. or international application numbers are listed on a supplemental priority sheet attached hereto.

私は、ここに自己の知識にもとずいて行った陳述がすべて真実であり、自己の所有する情報および信ずるところに従って行った陳述が真実であると信じ、さらに故意に虚偽の陳述等を行った場合、合衆国法典第18部第1001条により、罰金もしくは禁錮に処せられるか、またはこれらの刑が併科され、またかかる故意による虚偽による陳述が本願ないし本願に対して付与される特許の有効性を損なうことがあることを認識して、以上の陳述を行ったことを宣言する。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

私、下記署名者は、ここに記載の米国弁護士または代理人に本出願に関し特許商標庁にて取られるいかなる行為に関して、同米国弁護士又は代理人が、私に直接連絡なしに私の外国弁護士或いは法人代表者からの指示を受け取り、それに従うようここに委任する。この指示を出す者が変更の場合には、ここに記載の米国弁護士又は代理人にその旨通知される。

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from either his foreign patent agent or corporate representative, if any, as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.

Japanese Language Utility or Design Patent Application Declaration

委任状: 私は、下記発明者として、下記に明記された顧客番号を伴う以下の弁護士又は、代理人をここに選任し、本願の手続きを遂行すること並びにこれに関する一切の行為を特許商標庁に対して行うことを委任する。そして全ての通信はこの顧客番号宛に発送される。

顧客番号 7055

現在選任された弁護士は下記の通りである。

Neil F. Greenblum
Bruce H. Bernstein
Roger P. Glass
James L. Rowland
Arnold Turk

POWER OF ATTORNEY: As a named inventor, I hereby appoint the attorney(s) and/or agent(s) associated with the Customer Number provided below to prosecute this application and transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to that Customer Number:

CUSTOMER NUMBER 7055

The appointed attorneys presently include:

Reg. No. 28,394
Reg. No. 29,027
Reg. No. 30,841
Reg. No. 32,674
Reg. No. 33,094

Address: GREENBLUM & BERNSTEIN, P.L.C.

1941 ROLAND CLARKE PLACE
RESTON, VA 20191

直接電話連絡先: (名称および電話番号)

Direct Telephone Calls to: (name and telephone number)

GREENBLUM & BERNSTEIN, P.L.C.

(703) 716-1191

唯一のまたは第一の発明者の氏名

Full name of sole or first inventor

同発明者の署名

日付

Koichi SATO

Date

住所

Koichi Sato

July 12, 2000

Residence

Saitama, Japan

国籍

Citizenship

Japan

郵便の宛先

Post Office Address

c/o ASAHI KOGAKU KOGYO KABUSHIKI KAISHA,
36-9, Maenocho 2-chome, Itabashi-ku,
Tokyo, Japan

第2の共同発明者の氏名 (該当する場合)

Full name of second joint inventor, if any

同第2共同発明者の署名

日付

Second Inventor's signature

Date

住所

Residence

国籍

Citizenship

郵便の宛先

Post Office Address

(第6またはそれ以降の共同発明者に対しても同様な情報および署名を提供すること。)

(Supply similar information and signature for third and subsequent joint inventors.)